



MIDDLE CONNECTION:  
EMBED ANGLE (4 PER  
PIECE) WITH PLATE  
WELDED TO ANGLES TO  
JOIN PIECES

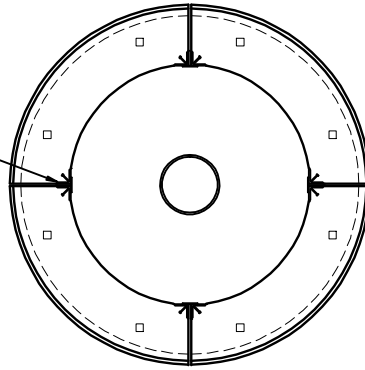

PLAN VIEW

TOP CONNECTION:  
DOWEL PIN GROUTED  
SOLID IN PROVIDED HOLE  
IN STONE ABOVE AND  
BELOW.  
BEARING ANGLE BY  
OTHERS.

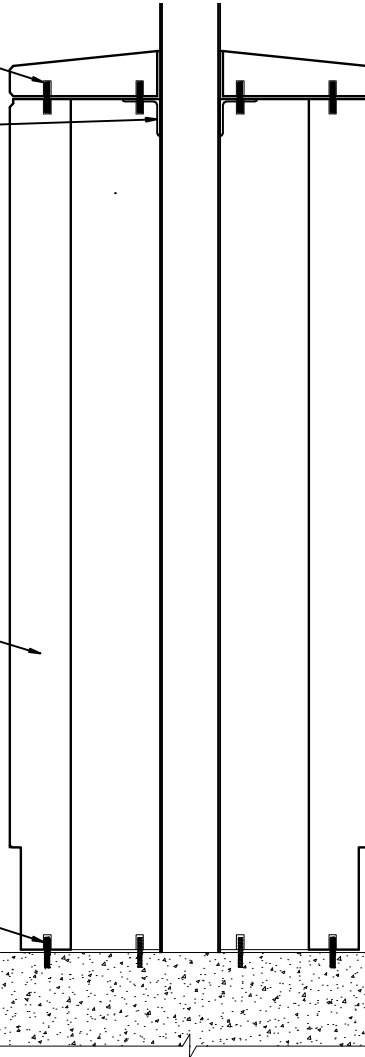

REBAR AS REQUIRED

BOTTOM CONNECTION:  
DOWEL PIN GROUTED  
SOLID IN PROVIDED HOLE  
IN STONE AN IN MASONRY  
BELOW.