


TOP CONNECTION:
CAST IN INSERT.

STRAP ANCHOR SCREWED TO
INSERT AND BOLTED TO CMU
BACK UP, 3 PER PIECE.

BOTTOM CONNECTION:
WELDABLE ROD WELDED TO
STRUCTURAL PLATE AND
GROUTED SOLID IN PROVIDED
SLOT IN STONE.

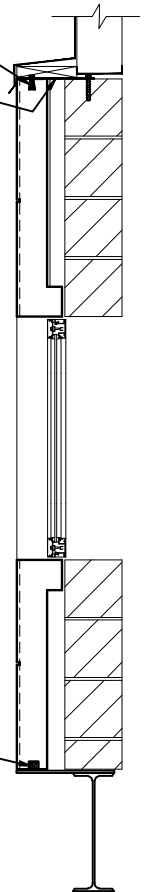

SECTION A/AA